

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
21 February 2002 (21.02.2002)

PCT

(10) International Publication Number
WO 02/14098 A2

- (51) International Patent Classification⁷: **B60K 31/00**
- (21) International Application Number: PCT/US01/25594
- (22) International Filing Date: 16 August 2001 (16.08.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/226,160 16 August 2000 (16.08.2000) US
- (71) Applicant: **RAYTHEON COMPANY** [US/US]; 141 Spring Street, Lexington, MA 02421 (US).
- (72) Inventors: **RUSSELL, Mark, E.**; 5 Buckboard Drive, Westford, MA 01866 (US). **DELICHECCOLO, Michael, Joseph**; 4 Chesapeake Drive, Westford, MA 01866 (US). **WOODINGTON, Walter, Gordon**; 222 Concord Road, Lincoln, MA 01773 (US). **VAN REES, H., Barteld**; 42 Pinewood Road, Needham, MA 02492 (US). **FIRDA, John, Michael**; 10 Summer Street, Apt. #3, Andover, MA 01810 (US). **LIPPERT, Delbert**; 13 Simmons Road, Cobden, Ontario K0J1K0 (CA).
- (74) Agents: **ROUILLE, David, W** et al.; Daly, Crowley & Mofford, LLP, Suite 101, 275 Turnpike Street, Canton, MA 02021 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— *without international search report and to be republished upon receipt of that report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: SAFE DISTANCE ALGORITHM FOR ADAPTIVE CRUISE CONTROL

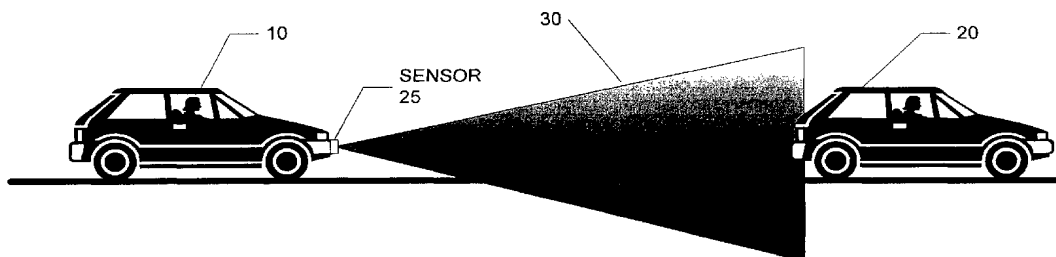

(57) Abstract: In accordance with the present invention, an adaptive cruise control system includes a radio frequency (RF) transmit receive (TR) sensor module (or more simply "sensor") disposed such that a detection zone is deployed in front of a vehicle. The sensor includes a sensor antenna system which comprises a transmit antenna for emitting or transmitting an RF signal and a receive antenna for receiving portions of the transmitted RF signal which are intercepted by one or more objects within a field of view of the transmit antenna and reflected back toward the receive antenna.



WO 02/14098 A2

SAFE DISTANCE ALGORITHM FOR ADAPTIVE CRUISE CONTROL

BACKGROUND OF THE INVENTION

One option that is popular with motor vehicles is cruise control. Cruise control allows an operator of a motor vehicle to set a predetermined speed for the vehicle, and maintains the vehicle at that speed until either the cruise control is turned off, or the brakes are applied.

A motor vehicle typically has a speed sensor mounted on an output shaft of a transmission. The speed sensor provides a series of pulses to a computer. When a vehicle's speed increases the frequency of the pulses will also increase. There is a concomitant decrease in the frequency of the pulses from the speed sensor when the speed of the vehicle decreases. For a given vehicle speed, there is a correlated frequency of the pulse stream from the speed sensor. The cruise control attempts to maintain the pulse frequency of the desired speed by regulating the accelerator of the vehicle.

The cruise control stores the speed of the vehicle when the cruise control is set to the desired speed. The cruise control receives the pulse stream from the speed sensor and compares the frequency of the pulse stream to the frequency value of the set speed. The cruise control, in response to a difference between the pulse stream from the sensor and the stored set value operates a vacuum controlled diaphragm that is coupled to the accelerator linkage. The accelerator is controlled in order to maintain the pulse stream from the speed sensor as close to the stored value as possible.

It is common for a vehicle operator to use cruise control to maintain a constant speed on a highway. In the event another operator makes a lane change into the path of the vehicle or the vehicle comes upon a slower driver the operator is required to disable the cruise control, typically by stepping on the brake. A problem occurs when the operator is slow to react to the other vehicle and fails to disable the cruise control in time.

In view of the dangers associated with automobile travel, there is an ongoing need for enhanced automobile driver aides. One possible area of increased driver aides involves detection of objects in front of a vehicle. As the vehicle approaches objects (e.g. other vehicles, pedestrians and obstacles) or as objects approach the vehicle a driver cannot always detect the object and perform intervention actions necessary to avoiding a collision with the object.

To enhance the safety of trucks, for example, sensor systems or more simply "sensors" for detecting objects around a truck have been suggested. Such sensors typically include an optical or infrared (IR) detector for detecting obstacles in the path of the vehicle.

In such an application, it is necessary to provide a sensor capable of accurately and reliability detecting objects in the path of the vehicle.

Radar is a suitable technology for implementing a sensor for use in vehicles such as automobiles and trucks. One type of radar suitable for this purpose is Frequency Modulated Continuous Wave (FMCW) radar. In typical FMCW radar, the frequency of the transmitted CW signal linearly increases from a first predetermined frequency to a second predetermined frequency. FMCW radar has the advantages of high sensitivity, relatively low transmitter power and good range resolution.

Because sensors disposed on vehicles are consumer products that may affect the safety of vehicles, the accuracy and reliability of the sensors are tantamount. Aspects of the sensors which contribute to its accuracy and reliability include its susceptibility to noise and the overall precision with which received radio frequency (RF) signals are processed to detect objects within the field of view of the sensor. Susceptibility to noise for example can cause false detections and, even more deleteriously, cause an object to go undetected.

Further significant attributes of the sensors are related to its physical size and form factor. Preferably, the sensor is housed in a relatively small enclosure or housing mountable behind a surface of the vehicle. For accuracy and reliability, it is imperative that the transmit antenna and receive antenna and circuitry of the sensor are unaffected by attributes of the vehicle (e.g. the vehicle grill, bumper or the like) and that the sensors are mounted to the vehicle in a predictable alignment.

It would, therefore, be desirable to provide a sensor system which is capable of detecting the presence of objects in front of a vehicle and further to detect the speed of these objects. Once this information is obtained the speed of the vehicle can be adjusted to maintain a safe trailing distance behind an object located in front of the vehicle.

BRIEF SUMMARY OF THE INVENTION

In accordance with the present invention, a detection system is utilized to control the speed of a vehicle, known as Adaptive Cruise Control. The system includes a radio frequency (RF) transmit receive (TR) sensor module (or more simply "sensor") disposed such that a detection zone is deployed in front of a vehicle. The sensor includes a sensor antenna system which comprises a transmit antenna for emitting or transmitting an RF signal and a receive antenna for receiving portions of the transmitted RF signal which are intercepted by one or more

objects within a field of view of the transmit antenna and reflected back toward the receive antenna. A signal antenna can be used for both the transmitting and receiving.

With this particular arrangement, a detection system that detects objects in a region about a front of a vehicle is provided. If the system determines that the vehicle is approaching an object or that an object is approaching the vehicle, then the sensor initiates steps that are carried out in accordance with a set of rules that control the speed of the vehicle. The speed of the vehicle is adjusted to maintain a safe trailing distance behind the detected object, thereby providing an adaptive cruise control function to the vehicle.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing features of this invention, as well as the invention itself, may be more fully understood from the following description of the drawings in which:

Figure 1 is a diagram showing a lead vehicle and a trailing vehicle equipped with the present invention;

Figure 2 is a flow chart of the presently disclosed method;

Figure 3 is a diagram of vehicle equipped with a near object detection (NOD) system including the forward looking remote sensor (FLRS) present invention; and

Figure 4 is a block diagram of the FLRS of Figure 3 that includes the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to Figure 1, a vehicle 10 is shown having a zone of coverage 20 for performing adaptive cruise control. Vehicle 10 is shown as an automobile, however the presently disclosed invention could be used with any other type of vehicle such as a motorcycle, truck, aircraft, marine vehicle, agricultural vehicle or the like.

The adaptive cruise control zone of coverage 20 is provided by a forward looking sensor 25 described in U.S. Patent No. 5,929,802 assigned to the assignee of the present invention and incorporated herein by reference. The forward-looking sensor is part of an RF detection system that utilizes an antenna system that provides multiple beams in the coverage zone. In this manner, the particular direction in which another object approaching the vehicle or vice-versa can be found. In one particular embodiment, the sensor utilizes an antenna system that includes eight separate antenna beams. Therefore, the RF system can operate in a manner similar to that described in the above-referenced Patent No. 5,929,802.

The sensor utilizes Frequency Modulated Continuous Wave radar which transmits a linear FM signal which is reflected from objects within the radar's zone of coverage. The reflected signal is compared (mixed) with the transmit signal to determine the round trip travel time of the reflected signal via a frequency difference. This frequency difference is known as the IF signal.

5 The frequency of the IF signal is proportional to the range of the object. The FMCW radar can detect stationary objects as well as objects with no motion relative to the originating vehicle (e.g. another vehicle traveling at the same speed).

As shown in Figure 1 a first vehicle 10 is equipped with a detection system that is coupled to the accelerator of the vehicle.. The detection system includes a transmit antenna, a receive
10 antenna, a receiver circuit and an interface to control the accelerator of the first vehicle. The sensor provides a zone of coverage 30. The transmit antenna of the sensor provides a Frequency Modulated Continuous Wave (FMCW) radar which transmits an FM signal providing the zone of coverage 30. Vehicle 10 is referred to as a trailing vehicle. When trailing vehicle 10 encounters a lead vehicle 20, the FM signal provided by the transmit antenna is reflected by the
15 lead vehicle back to the sensor of trailing vehicle 10. The reflected signal is received by the receive antenna and is compared with the transmit signal. The frequency difference between the transmit signal and the received signal is proportional to the distance between the lead vehicle and the trailing vehicle. By providing continuous signals, the speed of the lead vehicle with respect to the trailing vehicle can be determined from repeated measurements of the reflected
20 signals.

A well-known safety rule is the so-called "three second" rule. The three second rule states that a safe distance between a lead vehicle and a trailing vehicle is the distance that can be covered in three seconds traveling at the speed of the lead vehicle. This distance translates to approximately 198 feet at 45 miles per hour, 242 feet at 55 miles per hour and 286 feet at 65
25 miles per hour.

In a particular embodiment the three-second rule is used to determine a travel distance, though other rule sets could also be used.. This travel distance provides a base line distance, but to provide a larger degree of safety, the travel distance is modified to take into account the weight of the trailing vehicle. When the trailing vehicle is large, it will take more time to stop than a
30 lighter vehicle, therefore the travel distance is modified according to the weight of the trailing vehicle to provide a safe trailing distance.

With the safe trailing distance determined, the sensor adjusts the accelerator of the trailing

vehicle to keep the safe trailing distance maintained between itself and the lead vehicle. This is done automatically and dynamically, so that the driver input is reduced or removed. For example, if the trailing vehicle were traveling on a highway and has its cruise control set at 65 miles per hour, and a vehicle changes lanes in front of the driver, the accelerator is dynamically
5 controlled to permit a safe traveling distance between the trailing vehicle and the lead vehicle. Similarly, if a slower moving vehicle is encountered, the accelerator is controlled such that the faster moving trailing vehicle does not overcome the safe trailing distance.

Referring now to Figure 2 a flow chart of the presently disclosed method is shown. An initial step 110 of the method involves inputting the weight of the vehicle which is equipped with
10 the sensor (the trailing vehicle). The weight of the vehicle is used later to aid in establishing a desired trailing distance between the trailing vehicle and a lead vehicle. This step is only done initially, but can be modified if the system is installed on a different vehicle or if the vehicle is towing something.

The next step 120 is to determine the speed of the lead object. As described above, the
15 sensor utilizes a FMCW signal to determine the presence and relative speed of an object located within the zone of coverage of the sensor. The sensor will detect objects that have the same speed as the trailing vehicle, as well as objects that are completely stopped.

Once the presence and relative speed of a lead vehicle has been determined, the safe trailing distance is calculated, as recited in step 130. The trailing distance can be determined
20 in a number of ways, such as by using the three-second rule or other rule sets which relate a trailing distance to a speed of a vehicle. The trailing distance determination may also take into account the weight of the trailing vehicle or any other characteristics that would have an impact on determining a safe trailing distance.

The next step is to dynamically adjust the accelerator of the trailing vehicle to maintain
25 the desired safe trailing distance between the lead vehicle and the trailing vehicle. This is shown in step 140. The system is dynamic, in that the transmitting and receiving of the signals are continuous, as is the determining of a safe trailing distance and the maintaining of the safe trailing distance.

While the forward looking sensor used to provide the adaptive cruise control function can
30 operate independently, the system may also be included as part of a near-object detection system (NODS). Referring now to Figure 3 and Figure 4, a near-object detection (NOD) system 210 is disposed on a vehicle 10 which is here shown in phantom since it is not properly a part of the

NOD system 210. In this particular embodiment, the near-object detection system 210 includes a forward-looking sensor (FLS) 216 described above, an EOS sensor 218, a plurality of side-looking sensor (SLS) systems 220 and a plurality of rear-looking sensor (RLS) systems 222. Each of the FLS, EOS, SLS, and RLS systems is coupled to a sensor processor 214.

5 In this particular embodiment, the sensor processor 214 is shown as a central processor to which each of the FLS, EOS, SLS, and RLS sensors may be coupled via a bus or other means. It should be appreciated that in an alternate embodiment, one or more of the FLS, EOS, SLS, and RLS sensors may include its own processors to perform the processing described below. In this case, the near-object detection system would be provided as a distributed processor system.

10 Regardless of whether the near-object detection system includes a single or multiple processors, the information collected by each of the sensors is shared and the processor (or processors in the case of a distributed system) implement a decision or rule tree. For example the sensor processor is coupled to the airbag system 224, the adaptive cruise control interface 226, and the braking system 228 of the vehicle. In response to signals from one or more of the
15 FLS, EOS, SLS, and RLS systems, the sensor processor may determine that it is appropriate to “pre-arm” the airbag of the vehicle, adjust the accelerator, or engage the braking system. Other examples are also possible.

For example, the NOD system 10 may be used for a number of functions including but not limited to blind spot detection, lane change detection, pre-arming of vehicle air bags and to
20 perform a lane stay function, and the above-mentioned pre-arm airbag function.

It should be appreciated that the sensors may be removably deployed on the vehicle. That is, in some embodiments the sensors may be disposed external to the body of the vehicle (i.e. disposed on an exposed surface of the vehicle body), while in other systems the sensors may be embedded into bumpers or other portions of vehicle (e.g. doors, panels, quarter panels, and
25 vehicle front ends, and vehicle rear ends). It is also possible to provide a system which is both mounted inside the vehicle (e.g., in the bumper or other location) and which is also removable.

Since the characteristics of a single sensor can be changed to allow the sensor to provide detection capabilities in coverage zones of different sizes and shapes, the sensor can also be used
30 on a vehicle that is larger or smaller than the vehicle as shown in Fig. 3. Thus, modification of a coverage zone provided by a particular sensor can be accomplished by programming the sensor and in particular by adjusting the range gates of the sensor.

In one embodiment, using a reconfigurable antenna changes the coverage zone. In one embodiment, the reconfigurable antenna is provided by using microelectromechanical (MEMs) devices that are used to change beam shape and thus beam coverage. The MEMS can change the aperture shape and thus the shape of the beam.

5 The sensor can be updated. In one particular embodiment, a vehicle owner brings the vehicle to a dealership or other upgrade station and the upgrade station downloads a software upgrade to a programming station. The upgrade may be downloaded from the software upgrade area to the upgrade station via a secure wireless local area network (LAN) or a CD-ROM mailed to the upgrade station or any other means for transmitting software between two points as is
10 known to those of ordinary skill in the art. Once the upgrade station has the desired software upgrade, a vehicle owner brings the vehicle to the software upgrade station and the upgrade software is transmitted to the vehicle, thereby upgrading software in each of the sensors. In an alternate system, the software upgrade is fed via a satellite system and then transmitted directly from the satellite system to the vehicle. Using either technique, the software operating in the
15 sensors and/or the sensor processor can be modified.

Having described the preferred embodiments of the invention, it will now become apparent to one of ordinary skill in the art that other embodiments incorporating their concepts may be used. It is felt therefore that these embodiments should not be limited to disclosed embodiments but rather should be limited only by the spirit and scope of the appended claims.

20 All publications and references cited herein are expressly incorporated herein by reference in their entirety.

What is claimed is:

CLAIMS

- 1 1. A method of providing adaptive cruise control comprising the steps of:
2 determining the speed of an object;
3 calculating a trailing distance between a vehicle and the object; and
4 adjusting the speed of the vehicle to maintain said trailing distance between the object and
5 the vehicle.
- 1 2. The method of claim 1 wherein said step of calculating a trailing distance comprises the
2 steps of:
3 determining a travel distance; and
4 adjusting said travel distance to account for a weight of said vehicle.
- 1 3. The method of claim 2 wherein said step of determining a travel distance comprises
2 determining, from the speed of the object, the distance traveled by said object in a predetermined
3 period of time.
- 1 4. The method of claim 3 wherein said predetermined period of time comprises
2 approximately three seconds.
- 1 5. The method of claim 1 wherein said step of determining comprises the steps of :
2 transmitting a first RF signal;
3 receiving a second RF signal;
4 comparing said second RF signal with said first RF signal to determine a
5 frequency difference, wherein said frequency difference is proportional to a distance between said
6 object and said vehicle.
- 1 6. Method of claim 1 wherein said step of adjusting comprises decreasing the speed of the
2 vehicle when a distance between the object and the vehicle is less than said trailing distance.
- 1 7. The method of claim 5 wherein said second RF signal comprises a reflection of said first
2 RF signal.

1 8. The method of claim 5 wherein said first RF signal comprises a Frequency Modulated
2 Continuous Wave (FMCW) signal.

1 9. The method of claim 1 wherein said vehicle is selected from the group comprising an
2 automobile, a motorcycle, a truck, an aircraft, a marine vehicle, and an agricultural vehicle.

1 10. The method of claim 1 further comprising the step of upgrading said sensor.

1 11. The method of claim 1 further comprising the step of changing a coverage zone provided
2 by said sensor

1 12. An adaptive cruise control system comprising:

2 a sensor for providing detection coverage in a predetermined coverage zone in front of
3 a vehicle, the sensor comprising:

4 a transmit antenna for transmitting a first RF signal;

5 a receive antenna for receiving a second RF signal; and

6 a receiver circuit, coupled to said received antenna; and

7 an interface coupling said receiver circuit to an accelerator of the vehicle, and

8 wherein said sensor determines the speed of an object in front of the vehicle, calculates a safe
9 trailing distance behind the object in front of said vehicle, and adjusts the accelerator of the
10 vehicle to maintain said safe trailing distance.

1 13. The adaptive cruise control system of claim 12 wherein said trailing distance comprises
2 a travel distance which is adjusted to account for a weight of the vehicle.

1 14. The adaptive cruise control system of claim 13 wherein said travel distance comprises the
2 distance traveled by said object in a predetermined period of time.

1 15. The adaptive cruise control system of claim 14 wherein said predetermined period of time
2 comprises approximately three seconds.

1 16. The adaptive cruise control system of claim 12 wherein said the speed of the object is
2 determined by comparing the second RF signal with said first RF signal to determine a frequency
3 difference, wherein said frequency difference is proportional to a distance between said object and
4 said vehicle.

1 17. The adaptive cruise control system of claim 12 wherein said sensor decreases the speed
2 of the vehicle when a distance between the vehicle and the object is less than said trailing
3 distance.

1 18. The adaptive cruise control system of claim 12 wherein said second RF signal comprises
2 a reflection of said first RF signal.

1 19. The adaptive cruise control system of claim 12 wherein said first RF signal comprises a
2 Frequency Modulated Continuous Wave (FMCW) signal.

1 20. The adaptive cruise control system of claim 12 wherein said vehicle is selected from the
2 group comprising an automobile, a motorcycle, a truck, an aircraft, a marine vehicle, and an
3 agricultural vehicle.

1 21. The adaptive cruise control system of claim 12 wherein said sensor is upgradeable.

1 22. The adaptive cruise control system of claim 12 wherein said sensor is capable of
2 providing different coverage zones.

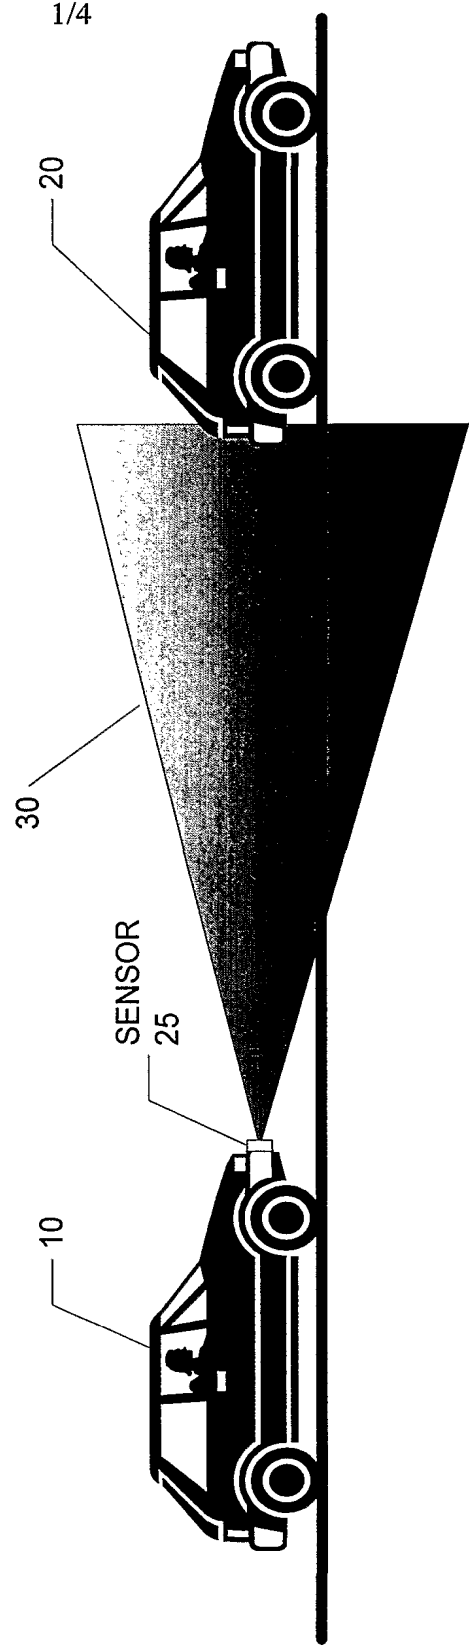


FIGURE 1

2/4

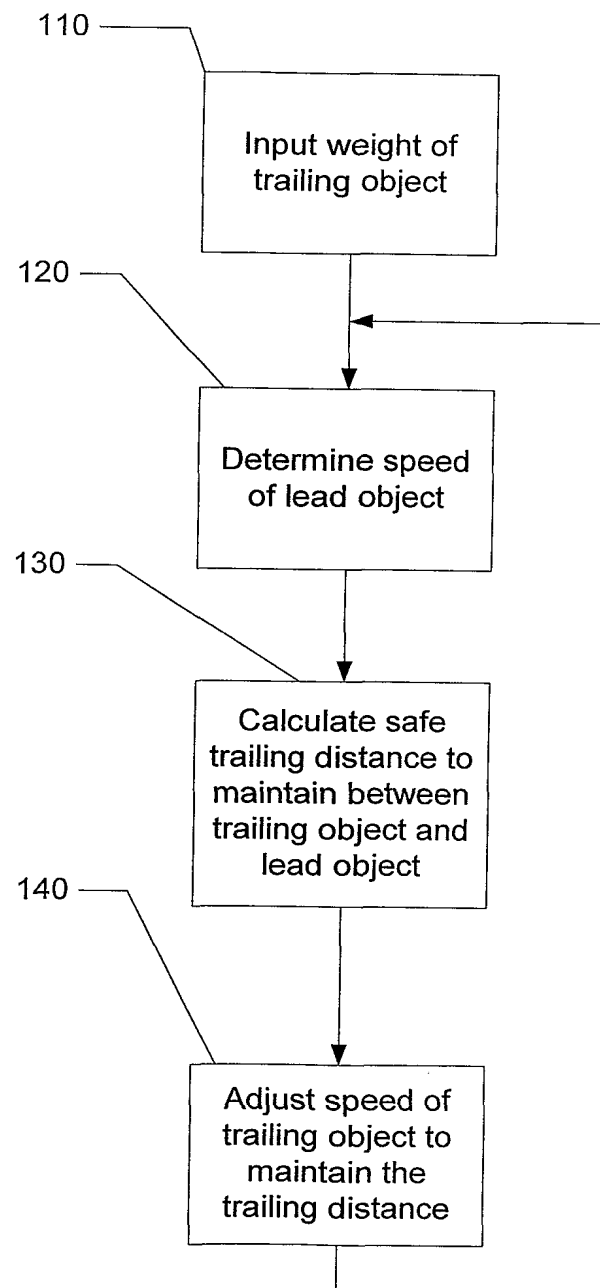


FIGURE 2

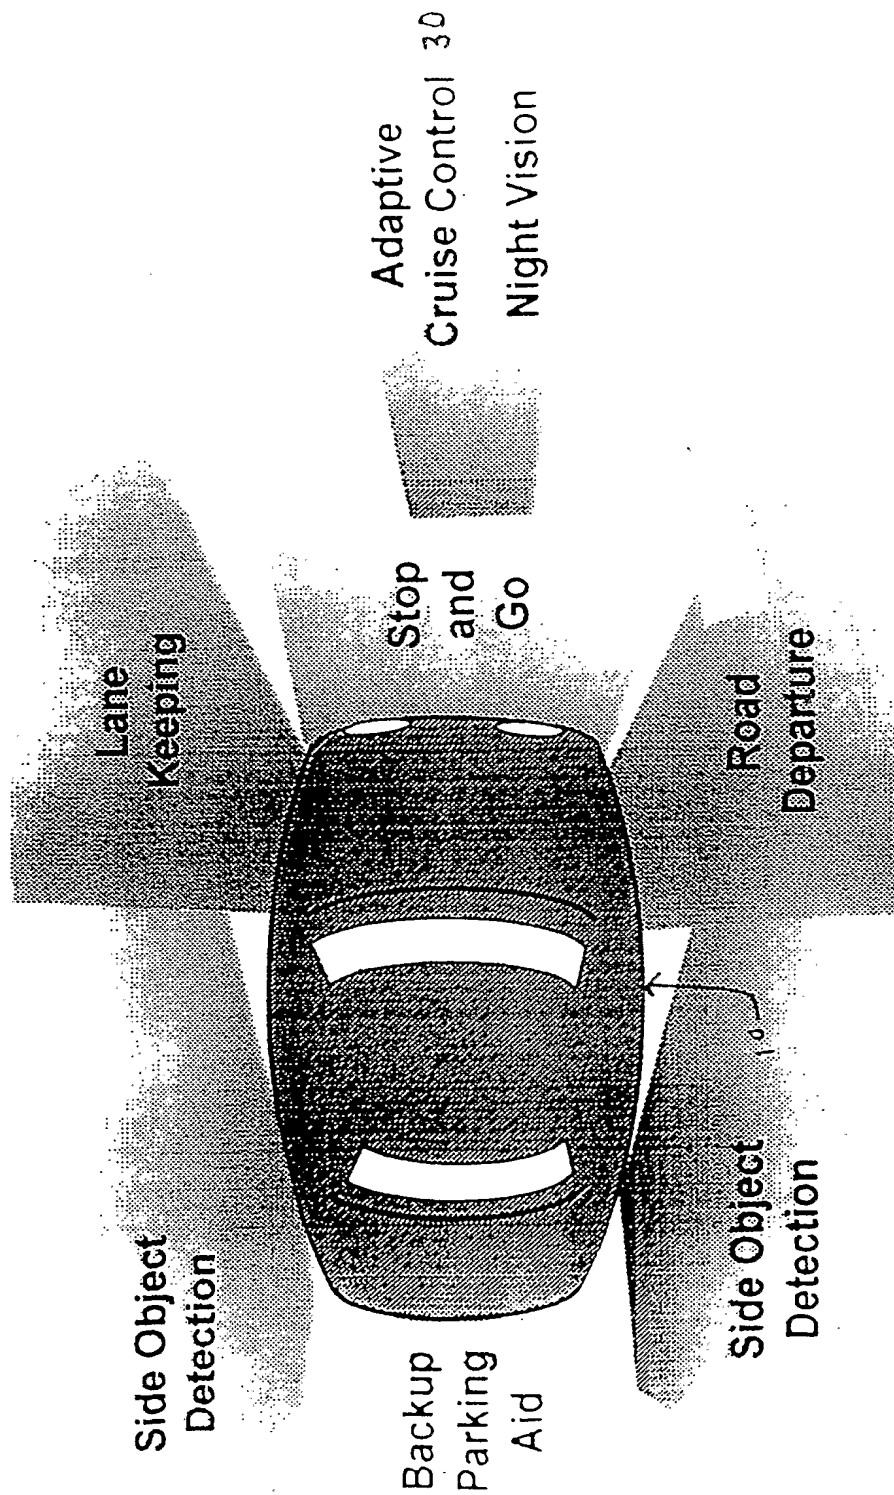


FIGURE 3

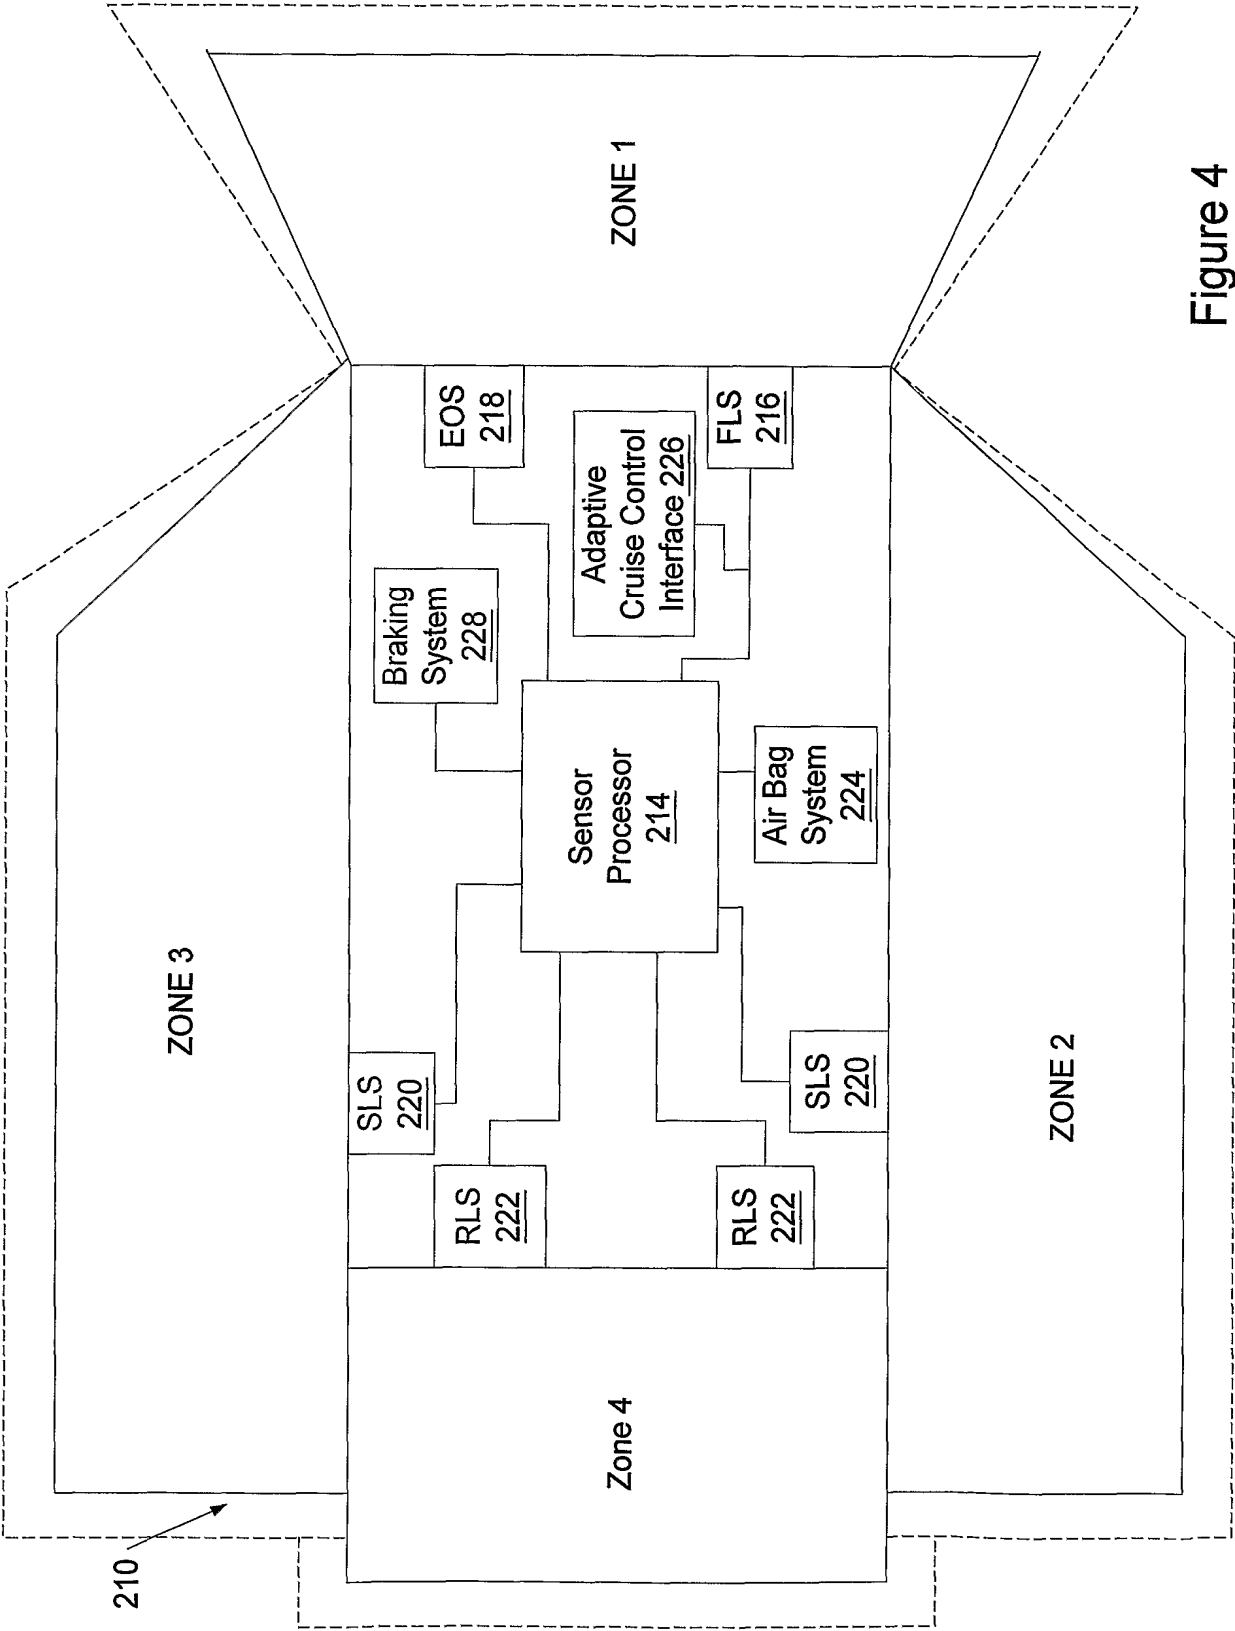


Figure 4

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 February 2002 (21.02.2002)

PCT

(10) International Publication Number
WO 02/014098 A3

(51) International Patent Classification⁷: **B60K 31/00**,
G01S 13/93

(21) International Application Number: PCT/US01/25594

(22) International Filing Date: 16 August 2001 (16.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/226,160 16 August 2000 (16.08.2000) US

(71) Applicant: **RAYTHEON COMPANY** [US/US]; 141
Spring Street, Lexington, MA 02421 (US).

(72) Inventors: **RUSSELL, Mark, E.**; 5 Buckboard Drive,
Westford, MA 01866 (US). **DELICHECCOLO, Michael,**
Joseph; 4 Chesapeake Drive, Westford, MA 01866 (US).
WOODINGTON, Walter, Gordon; 222 Concord Road,
Lincoln, MA 01773 (US). **VAN REES, H., Barteld**; 42
Pinewood Road, Needham, MA 02492 (US). **FIRDA,**
John, Michael; 10 Summer Street, Apt. #3, Andover,
MA 01810 (US). **LIPPERT, Delbert**; 13 Simmons Road,
Cobden, Ontario K0J1K0 (CA).

(74) Agents: **ROUILLE, David, W** et al.; Daly, Crowley &
Mofford, LLP, Suite 101, 275 Turnpike Street, Canton, MA
02021 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,
SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,
TG).


Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(88) Date of publication of the international search report:
11 July 2002

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: SAFE DISTANCE ALGORITHM FOR ADAPTIVE CRUISE CONTROL

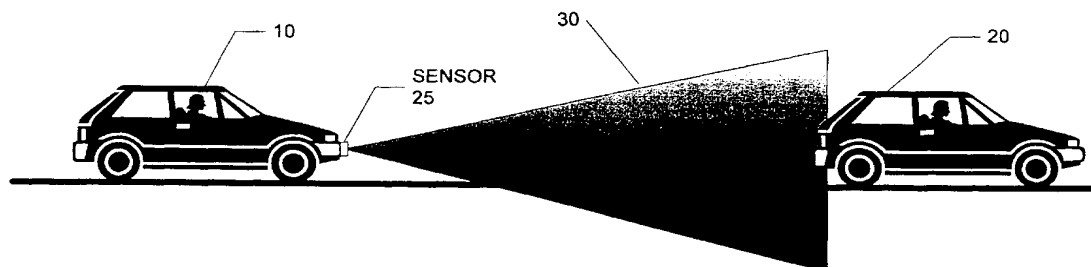

(57) Abstract: In accordance with the present invention, an adaptive cruise control system includes a radio frequency (RF) transmit receive (TR) sensor module (or more simply "sensor") disposed such that a detection zone is deployed in front of a vehicle. The sensor includes a sensor antenna system which comprises a transmit antenna for emitting or transmitting an RF signal and a receive antenna for receiving portions of the transmitted RF signal which are intercepted by one or more objects within a field of view of the transmit antenna and reflected back toward the receive antenna.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/25594

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B60K31/00 G01S13/93

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01S B60K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category ° | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|--------------------------------|
| X | EP 0 484 995 A (GEN MOTORS CORP) 13 May 1992 (1992-05-13) | 1,6 |
| Y | abstract column 2, line 47 -column 3, line 46 column 6, line 20 - line 37 column 7, line 18 - line 36 --- | 2,5,7-9, 11-13, 16-20,22 |
| Y | EP 0 982 173 A (EATON CORP) 1 March 2000 (2000-03-01) abstract paragraph '0001! - paragraph '0013! paragraph '0028! - paragraph '0034! --- -/-- | 2,13 |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

18 April 2002

Date of mailing of the international search report

07/05/2002

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Roost, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/25594

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|------------------------------|
| Y | US 5 929 802 A (RUSSELL MARK E ET AL) 27 July 1999 (1999-07-27) cited in the application abstract column 1, line 14 -column 2, line 41 column 4, line 66 -column 5, line 21 ---- | 5,7,8, 11,12, 16-19,22 |
| Y | EP 0 784 213 A (DAIMLER BENZ AEROSPACE AG) 16 July 1997 (1997-07-16) abstract page 2, line 3 - line 37 ---- | 9,20 |
| A | US 5 627 510 A (YUAN ZHIPING) 6 May 1997 (1997-05-06) abstract column 2, line 1 -column 3, line 23 ---- | 4,15 |
| A | US 5 517 197 A (ALGEO JERRY A ET AL) 14 May 1996 (1996-05-14) abstract column 1, line 7 -column 2, line 26 ----- | 10,21 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/25594

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|---|--|
| EP 0484995 | A | 13-05-1992 | US 5173859 A DE 69123947 D1 DE 69123947 T2 EP 0484995 A2 | 22-12-1992 13-02-1997 30-04-1997 13-05-1992 |
| EP 0982173 | A | 01-03-2000 | EP 0982173 A2 JP 2000099899 A | 01-03-2000 07-04-2000 |
| US 5929802 | A | 27-07-1999 | AU 1463699 A EP 1032847 A1 JP 2001524677 T WO 9927385 A1 US 6107956 A | 15-06-1999 06-09-2000 04-12-2001 03-06-1999 22-08-2000 |
| EP 0784213 | A | 16-07-1997 | DE 19601121 A1 EP 0784213 A2 | 17-07-1997 16-07-1997 |
| US 5627510 | A | 06-05-1997 | NONE | |
| US 5517197 | A | 14-05-1996 | NONE | |